

Energy Harvesting via Piezoelectricity

Tanvi Dikshit¹, Dhawal Shrivastava², Abhijeet Gorey³, Ashish Gupta⁴, Parag Parandkar⁵ and
Sumant Katiyal⁶

Abstract - In the present era, wireless data transmission techniques are commonly used in electronic devices. For powering them connection needs to be made to the power supply through wires else power may be supplied from batteries. Batteries require charging, replacement and other maintenance efforts. For example, in the applications such as villages, border areas, forests, hilly areas, where generally remote controlled devices are used, continuous charging of the microcells is not possible by conventional charging methods. So, some alternative methods need to be developed to keep the batteries full time charged and to avoid the need of any consumable external energy source to charge the batteries. To resolve such problems, Energy harvesting technique is proposed as the best alternative. There exists a variety of energy harvesting techniques but mechanical energy harvesting happens to be the most prominent. This technique utilizes piezoelectric components where deformations produced by different means are directly converted to electrical charge via piezoelectric effect. Subsequently the electrical energy can be regulated or stored for further use. The proposed work in this research recommends Piezoelectricity as an alternate energy source. The motive is to obtain a pollution-free energy source and to utilize and optimize the energy being wasted. In this paper two important techniques are stressed upon to harness the energy viz Piezoelectric Windmill and Increased Bandwidth Piezoelectric Crystal. Current work also illustrates the working principle of piezoelectric crystal and various sources of vibration for the crystal.

Index Terms - Energy Harvesting, Piezoelectricity, Piezoelectric Windmill, Increased Bandwidth Piezoelectric Crystal

1. INTRODUCTION

Energy harvesting has been a topic of discussion and research since three decades. With the ever increasing and demanding energy needs, unearthing and exploiting more and more energy sources has become a need of the day. Energy harvesting is the process by which energy is derived from external sources and utilized to drive the machines directly, or the energy is captured and stored for future use. Some traditional energy harvesting

schemes are solar farms, wind farms, tidal energy utilizing farms, geothermal energy farms and many more. With the advent of technology, utilization of these sources has increased by leaps and bounds [1]. When viewed on a large scale, energy harvesting schemes can be categorized as shown in Table I.

Type of Energy Harvesting	Energy Source	Solution	Ultimate Goal
Macro	Renewable sources like solar, wind, tidal etc.	Energy Management solutions	Reduce oil dependency
Micro	Small scale sources like vibration, motion, heat etc.	Ultra-low-power solutions	Driving low energy consuming devices

Table 1: Types of Energy Harvesting Schemes

Piezoelectric Energy Harvesting is a new and innovative step in the direction of energy harvesting. Not many researches have been carried out till now in this field, hence it is a challenging job to extract energy from piezoelectricity. Through this research paper, we will describe the basic working of a piezoelectric crystal. Then later in the paper, we have proposed the idea of combining energy from a number of piezoelectric crystals to obtain higher voltages. Certain ways of implanting the crystals at different places have also been cited in the paper. Piezoelectric crystals can be utilized to obtain voltages of very small values and hence can drive low voltage devices. Hence, Piezoelectric Energy Harvesting comes under the category of Micro scale energy harvesting scheme.

2. WORKING PRINCIPLE

The piezoelectric effect is a special material property that exists in many single crystalline materials. Examples of such crystalline structures are Quartz, Rochelle salt, Topaz, Tourmaline, Cane sugar, Berlinite (AlPO₄), Bone, Tendon, Silk, Enamel, Dentin, Barium Titanate (BaTiO₃), Lead Titanate (PbTiO₃), Potassium Niobate (KNbO₃), Lithium Niobate (LiNbO₃) etc.[2] There are two types of piezoelectric effect, direct piezoelectric effect and inverse piezoelectric effect. The direct piezoelectric effect is derived from materials generating electric potential when mechanical stress is applied and the inverse piezoelectric effect implies materials deformation when an electric field is applied. The energy harvesting via Piezoelectricity uses direct piezoelectric effect. The phenomenon will be clear from the diagram shown in Fig.1

^{1,2,3,4,5} Chameli Devi Institute of Technology and Management

⁶School of Electronics, DAV, Indore

E-Mail: ¹tanvi.d27@gmail.com,

²shrivastava.dhawal@gmail.com,

³abhijeetgorey2006@gmail.com,

⁴ashishgupta72@rediffmail.com, ⁵p_parag@yahoo.com and

⁶sumant578@yahoo.com

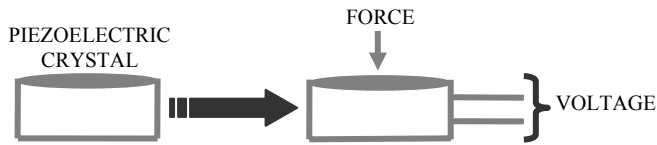


Figure 1: Principle of direct piezoelectric effect

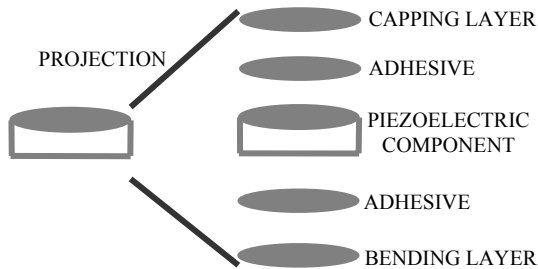


Figure 2: Structure of a piezoelectric component

Fig.2 shows the structure of a piezoelectric component being used for energy harvesting.

The output voltage obtained from a single piezoelectric crystal is in millivolts range, which is different for different crystals. And the wattage is in microwatt range. So in order to achieve higher voltages, the piezoelectric crystals can be arranged in cascading manner, that is, in series. The energy thus obtained is stored in lithium batteries or capacitors. This is the working principle behind piezoelectric energy harvesting system. Now the extreme engineering lies in optimization of piezoelectric energy, which is done in various ways. A lot of studies are being carried out in order to know which crystal will be the best to obtain maximum output voltage, what should be the structure of piezoelectric component, which type of circuit should be used at the output terminals of piezoelectric crystal in order to have maximum wattage. In the next section, we have mentioned a number of sources of vibration which are already being used for piezoelectric energy harvesting and a new idea in this direction has been proposed by us.

3. SOURCES OF VIBRATION FOR CRYSTAL PREVIOUS WORK

A. Power Generating Sidewalk

The piezoelectric crystal arrays are laid underneath pavements, side walks and other high traffic areas like highways, speed breakers for maximum voltage generation. The voltage thus generated from the array can be used to charge the chargeable Lithium batteries, capacitors etc. These batteries can be used as per the requirement [3].

B. Power Generating Boots Or Shoes

In United States Defense Advance Research Project Agency (DARPA) initiated a innovative project on Energy harvesting which attempts to power battlefield equipment by piezoelectric generators embedded in soldiers' boots [3]. However, these

energy harvesting sources put an impact on the body. DARPA's effort to harness 1-2 watts from continuous shoe impact while walking were abandoned due to the discomfort from the additional energy expended by a person wearing the shoes.

C. Gyms and Workplaces

Researchers are also working on the idea of utilizing the vibrations caused from the machines in the gym. At workplaces, while sitting on the chair, energy can be stored in the batteries by laying piezoelectric crystals in the chair. Also, the studies are being carried out to utilize the vibrations in a vehicle, like at clutches, gears, seats, shock-ups, foot rests.

D. Mobile Keypad and Keyboards

The piezoelectric crystals can be laid down under the keys of a mobile unit and keyboards. With the press of every key, the vibrations created can be used for piezoelectric crystal and hence can be used for charging purpose [4].

E. Floor Mats, Tiles and Carpets

A series of crystals can be laid below the floor mats, tiles and carpets which are frequently used at public places.

F. People Powered Dance Clubs

In Europe, certain nightclubs have already begun to power their night clubs, strobes and stereos by use of piezoelectric crystals. The crystals are laid underneath the dance floor. When a bulk of people use this dance floor, enormous amount of voltage is generated which can be used to power the equipments of the night club [5].

4. PROPOSED WORK

A. Piezoelectric Wind Mill

In order to energize low power consuming devices, microcells are invariantly used. But these microcells need to be charged once they get discharged. Hence if the devices are placed at remote places like villages, border areas, forests, hilly areas, then continuous charging of the microcells is not possible by conventional charging methods. In such cases, alternative options like solar energy and wind energy can be utilized. But cloudy days and rains restrict the use of solar energy. So, wind energy comes out to be the best alternative [6]. The idea about a Piezoelectric Wind mill will be clear from Fig. 3.

The piezoelectric wind mill that we have proposed consists of a fan with three blades to effectively capture the wind flow. A lever arm is connected to the windmill fan rotor and a translator is connected with this lever arm to convert rotational motion into translatory motion. A disc is connected at the lower end of translator, such that whenever it moves upwards and downwards, it compresses the piezoelectric crystals. Hence for different speeds of wind also, that is for different frequencies, the Piezoelectric Wind mill may function. Hence, it has higher workable bandwidth. The constant compression of piezoelectric crystals causes a huge amount of energy to be generated, which can comfortably drive the remotely placed low power consuming devices [2]. Hence, the concept of

Piezoelectric Wind mill can be used to harness piezoelectric energy very efficiently and effectively.

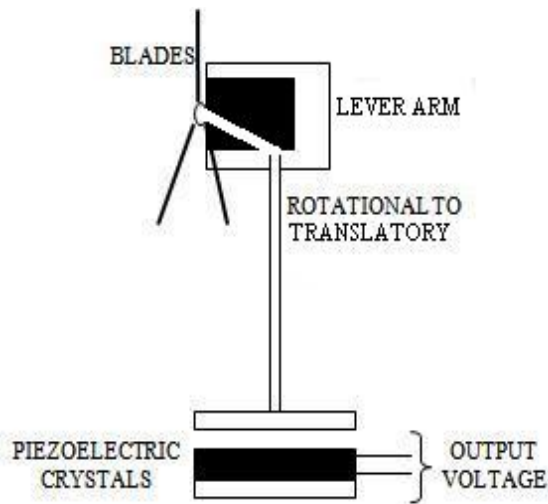


Figure 3: Piezoelectric Wind mill

B. Increased Bandwidth Piezoelectric Crystal

In order to increase the workable bandwidth, that is, in order to use piezoelectric crystals over a wide range of vibrations, we are proposing a new method. If in place of a single energy source, we make use of more than one, then the efficiency of harvesting system will definitely increase. Hence, we are making use of two energy converting techniques, one is the piezoelectric crystal and other is the electromagnetically induced voltage. Fig. 4 gives the structure of such type of system [7].

The system consists of a flexible strip, over which the piezoelectric crystals are mounted and at one end of the strip, a magnet is mounted. This magnet lies inside a stationary coil. At times, when intensity of vibration is high, voltage is obtained from piezoelectric crystals. Hence, at higher frequencies, piezoelectric crystals give the output. When intensity of vibration is less, the piezoelectric crystals do not give a considerable output. At lower frequencies, the magnet moves inside the stationary coil. This motion causes electromagnetic flux to be generated and hence an output voltage is obtained.

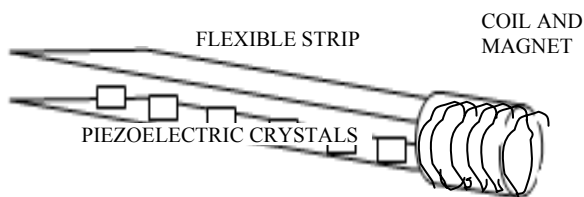


Figure 4: Piezoelectric crystals and electromagnetic energy

5. OUTPUT STAGE OF PIEZOELECTRIC ENERGY HARVESTING SYSTEM

The output of a piezoelectric crystal is alternating signal. In order to use this voltage for low power consuming electronic devices, it has to be first converted into digital signal [2]. This is done with the help of AC to DC converter as shown in Fig. 5. Fig.5 shows a simple diode rectifier to convert AC to DC. This is followed by a capacitor, which gets charged by the rectifier upto a pre-decided voltage, at which the switch closes and the capacitor discharges through the device. In this way, the energy can be stored in the capacitor, and can be discharged when required. But the energy harvesting capacity of this circuit is not appreciable. Hence, a DC to DC converter is used after bridge rectifier stage, which has been demonstrated in Fig. 6. The addition of DC-DC converter has shown an improvement in energy harvesting by a factor of 7.

A non-linear processing technique “Synchronized Switch Harvesting on Inductor” (SSHI) was also proposed in 2005 for harvesting energy [7]. It consists of a switching device in parallel with the piezoelectric element. The device is composed of a switch and an inductor connected in series. The switch is in open state except when the maximum displacement occurs in the transducer. At that instant, the switch is closed and the capacitance of the piezoelectric element and inductor together constitute an oscillator. The switch is kept closed until the voltage on the piezoelectric element has been reversed. This circuit arrangement of the output circuit is said to have a very high energy harvesting capacity. Fig. 7 shows the SSHI technique [6].

6. IMPLEMENTATION

Experimentation has been done on a Piezo-crystal and it is tested with a Light Emitting Diode (LED). The two terminals of the LED are connected with the two terminals of the crystal. Choice of Blue LED is being made for experimentation. Single stroke on the crystal blows blue LED with full intensity. Measured values of output voltage and current from the crystal come out to be 3.5 Volt and 100 milliamps. The only shortcoming of this using a single crystal and a LED was that both the voltage and current obtained exists instantaneously. To increase the range of voltage and current output, an assembly of 6 crystals in series and 6 such series has been put in parallel. When number of voltage sources are put in series, then the net voltage increases, while when a number of voltage sources are put in parallel, then the strength of signal, that is, current increases. This is the concept used behind the assembly. The output of parallel connection is fed to the current amplifier for signal strengthening and the output of series connection is fed to the amplifier for biasing purpose and also to the voltage amplifier. The assembly has been put under a doormat and the output obtained from amplifier has been very encouraging, which was around 6 V voltage and 1 ampere current. This magnitude of voltage and current can be certainly used to charge a battery. Fig. 8 shows the assembly used in our system.

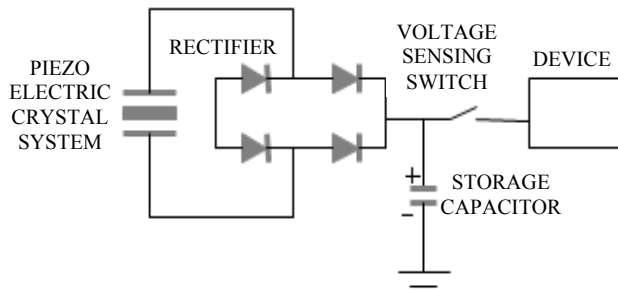


Figure 5: Bridge rectifier type AC to DC converter

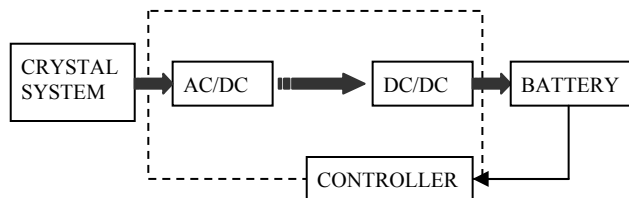


Figure 6: Energy Harvesting Circuit

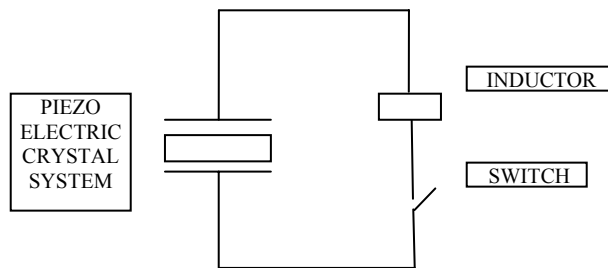


Figure 7: SSHI (Synchronized Switch Harvesting on Inductor) technique

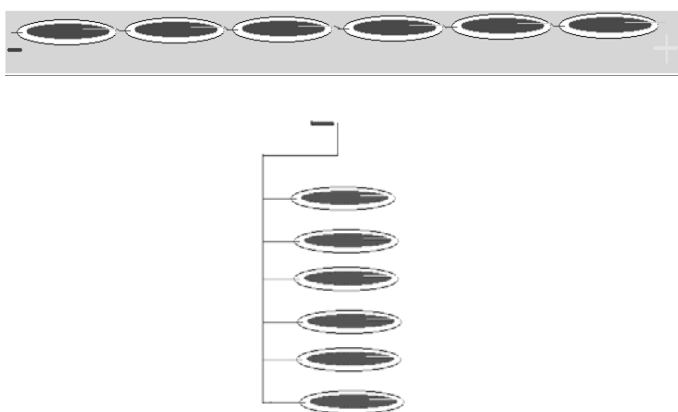


Figure 8: Series and parallel combination of crystals

6. COST EFFECTIVENESS

The assembly developed using series and parallel combination of piezo-crystals is very cost effective. A single crystal costs around 23 – 25 Rupees, and hence the cost of whole assembly is very less. It is very encouraging to get a good voltage and current at such a low cost at the same time utilizing the waste

energy. So, the assembly improves on the concern of cost effectiveness to a great extent and we are working on it to further improve upon the results of the system.

7. FUTURE SCOPE

The proposed work portrays the concept of Piezoelectric Energy Harvesting and the results obtained after the implementation are very encouraging. Future work of the proposed idea encompasses further amplification of the crystal output to a greater extent. Future lies in the inclusion of advanced material used to design the piezoelectric crystal which further amplifies the crystal output in terms of voltage as well as current. A study could be carried out from the variety of piezoelectric crystals and after comparing the results, the choice of the optimum material for the best performing crystal could be devised.

8. CONCLUSION

The method used to perform power harvesting is to use PZT materials that can convert the ambient vibration energy surrounding them into electrical energy. This electrical energy can then be used to power other devices or stored for later use. This technology has gained an increasing attention due to the recent advances in wireless and MEMS technology, allowing sensors to be placed in remote locations and operate at very low power [7]. The need for power harvesting devices is caused by the use of batteries as power supplies for these wireless electronics. As the battery has a finite lifespan, recharging needs to be done once discharged. Charging of batteries in order to provide energy to the electronic devices in the applications such as borders or hilly regions is a tedious job to do. Through this paper, we have proposed two new ways of harnessing the piezoelectric energy. Implementation aspects focuses on the practical work carried out in this field of Piezoelectric Energy Harvesting. The idea of Piezoelectric Windmill will solve the problem of continuous microcell discharging in the devices being used at remote places or in rough terrains. The concept of combining two energy sources piezoelectric energy and electromagnetic energy has been proposed in the paper. So these two ideas can greatly help in harnessing the piezoelectric energy.

REFERENCES

- [1]. U. K. Singh and R. H. Middleton, “Piezoelectric power scavenging of mechanical vibration energy” Australian Mining Technology Conference, 2-4 Oct. 2007, pp. 111-118.
- [2]. Takeuchi M, Matsuzawa S, Tairaku K, Takatsu C. “Piezoelectric generator as power supply for RFID-tags and applications”, Proc. IEEE Ultrasonics Symposium, New York City, USA, 28-31 Oct. 2007, pp. 2558-2561.
- [3]. Ahola J, Särkimäki V, Ahonen T, Kosonen A, Tiainen R, Lindh T., “Design considerations of energy harvesting wireless sensors for condition monitoring of electronic motors, Proc. 5th Int. Conf. Condition Monitoring &

Machinery Failure Prevention Technologies 15–18 July 2008, Edinburgh, UK.

- [4]. Roundy S., Wright P. K. and Rabaye J., "A. study of low level vibrations as a power source for wireless sensor nodes", *Computer Communications* 26 (2003) 1131–1144.
- [5]. Steven R. Anton and Henry A. Sodano, A review of power harvesting using piezoelectric materials (2003-2006), *Smart Materials and Structures* 16 (2007).
- [6]. Sujesha Sudevalayam, Purushottam Kulkarni, "Energy Harvesting Sensor Nodes: Survey and Implications", Dec. 19, 2008.
- [7]. Y. C. Shu and I. C. Lien, "Analysis of power output for piezoelectric energy harvesting systems", *Smart Materials and Structures* 15 (2006), pp. 1499-1512.

Continued from page no. 254

Sr. No.	Shannon Characteristics of a Good Encryption System	Proposed Technique
3	The implementation of the process should be as simple as possible.	√
4	Errors in ciphering should not propagate and cause corruption of further information in the message.	√
5	The size of the enciphered text should be no larger than the text of the original message	√

7. LIMITATIONS

1. Every repeated word is converted by the technique to the same floating point number hence a cryptanalyst might be able to derive some information from it.
2. Any floating point no has some degree to which it can precisely store the information, the current system does not provide precision control to convert the entire string or file.

8. CONCLUSION

The proposed technique for the private key encryption system provides an excellent method of substitution of plaintext with floating point numbers that are calculated on the basis of 256 character key which user have supplied .It can be used to secure very sensitive data: - As the system provides you with two keys, in case of very high security requirements the resident key can also be altered frequently and can be used to encrypt a string or an entire file by a single floating point number thus providing a cryptanalysts almost no data to work with. As the technique compresses the original text hence can be developed as a compressing technique. It is faster, required memory space of less than 15kb and provides an efficient data security during communications.

REFERENCES

- [1]. "Security in computing", Charles P.Pfleerer. W. Die, M.E. Hellman, New Directions in Cryptography, IEEE Transactions on Information Theory , 22, pp 644-654 , 1979.
- [2]. Yehoshua Perl, Loizos Gabriel, Arithmetic Interpolation Search for Alphabet Tables, IEEE Transactions on Computers, v.41 n.4, p.493-499, April 1992.
- [3]. Jeffrey Scott Vitter , P. Krishnan, Optimal prefetching via data compression, Journal of the ACM (JACM), v.43 n.5, p.771-793, Sept. 1996
- [4]. www.apprendrenligne.net/crypto/bibliotheque/PDF/Kwanga.pdf
- [5]. Alistair Moffat, Radford M. Neal, Ian H. Witten, Arithmetic coding revisited, ACM Transactions on

Information Systems (TOIS), v.16 n.3, p.256-294, July 1998.

- [6]. X.Marsault, Compression et Cryptage des Données Multimédias, Hermes, 1997.
- [7]. Eike Kiltz and John Malone-Lee. A General Construction of IND-CCA2 Secure Public Key Encryption. In: Cryptography and Coding, pages 152--166. Springer-Verlag, December 2003.
- [8]. D.S Yadav "Foundations of Information Technology", 2nd Edition, New age Publishers, by, P71-79.2004.
- [9]. James Keeler, Graphical implementation of Huffman and arithmetic coders, Journal of Computing Sciences in Colleges, v.19 n.5, p.289-290, May 2004.
- [10]. Martijn Stam. A Key Encapsulation Mechanism for NTRU. In: Cryptography and Coding, pages 410--427. Springer-Verlag LNCS 3796, December 2005.
- [11]. Bose, R. Pathak, S, A novel compression and encryption scheme using variable model arithmetic coding and coupled chaotic system ,IEEE Transactions on Circuits and Systems, Volume: 53 issue: 4 ,p. 848 - 857 ,ISSN: 1549-8328 ,April 2006.